


Panel PC Widescreen Modular Datasheet

Designed by FAS Tech AB in Sweden



Features

Widescreen Panel, Modular design, Easily upgradeable, IP65 Front panel, 24VDC and 230VAC. Esaver function.

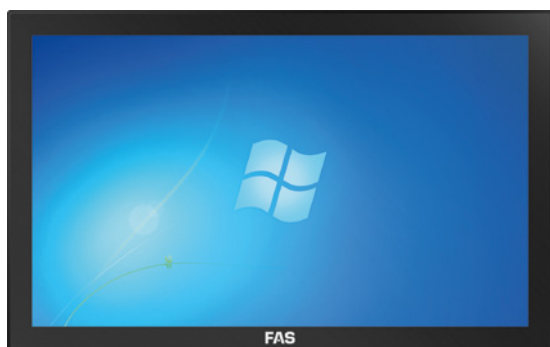

Product Specifications

Screen	11,6" Widescreen	15,6" Widescreen	18,5" Widescreen	21,5" Widescreen	24" Widescreen
Resolution	1366x768	1920x1080	1920x1080	1920x1080	1920x1080
Brightness	350cd/m2	400cd/m2	300cd/m2	250cd/m2	400cd/m2
Touchscreen	Capacitive Multi Touch 10 point				
CPU	Intel J1900 1.9Ghz Quad Core (Standard) Intel i5-4300U 1.9Ghz Dual Core (Optional) ARM Quad Core 1.2GHz (Optional)				
RAM	4GB DDR3 SODIMM (Option 8GB to 16GB DDR3 SODIMM)				
Storage	M-SATA 32GB (Option 60-500GB Disk)				
I/O Ports	3 x RS232, 1x RS422/485 / 4 x USB / 2x LAN RJ45 / 1x Power Switch / 1x 12VDC Input / 1x 24VDC Input				
Power Input	12V DC (11,5-12,5V) 24V DC (18-25V) 230VAC Adapter to 12V DC Included with all systems				
Power Usage	24VDC 28W	24VDC 35W	24VDC 45W	24VDC 45W	24VDC 60W
Size WxHxD MM	307x194x53	397x248x72	462x283x72	535x322x75	583x352x70
Weight	2.8Kg	3.3Kg	4.6Kg	5.3Kg	7Kg
O/S	Win 10 IoT / Win 10 Pro / Win 7 Emb / Win 7 Pro / Linux				
Operating Temp	0C to +50C				
Humidity (RH)	10% - 90%				
Display Lifetime	Operation Lifetime (LED) Minimum 50.000 Hours Operation life means brightness goes down to 50% to initial brightness. Minimum operation life time is estimated data.				
MTBF	100.000 Hours				
Vibration	1.0G, 5-500Hz Random				
Mounting	VESA 100 / Panel Mount				
Warranty	5 Years				
Approvals	CE / FCC				



FAS Tech AB

Fältherrevägen 2
15535 Nykvarn Sweden

Tfn: 08 515 104 34 Web: www.fasystem.se



Panel PC Cutout Holes

