



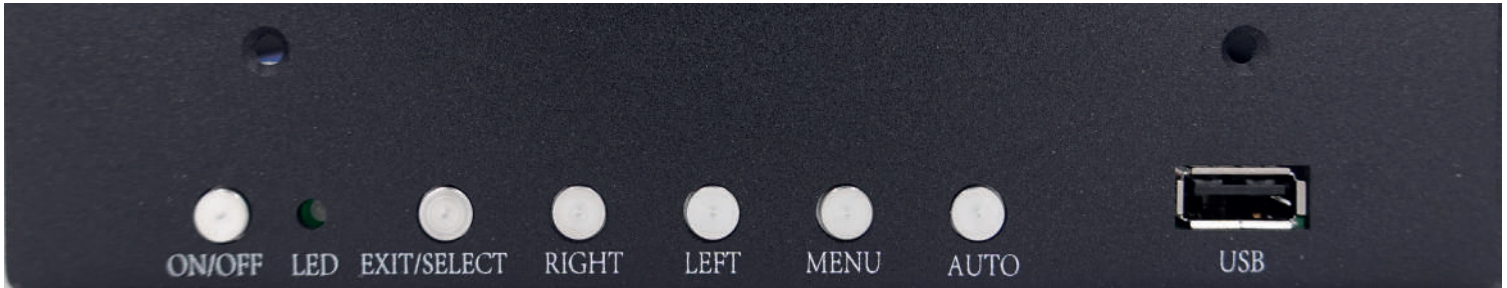

## Product Specifications

<b>Screen</b>	12" Display	15" Display	17" Display	19" Display
<b>Resolution</b>	1024x768	1024x768	1280x1024	1280x1024
<b>Brightness</b>	300cd/m2	300cd/m2	300cd/m2	300cd/m2
<b>Touchscreen</b>	Resistive Touch 4/5 wire (Option for Capacitive touch)			
<b>I/O Ports</b>	1x Power / 1x 12VDC Input / 1x 24VDC Input / 1x VGA/HDMI			
<b>Power Input</b>	12V DC (11,5-12,5V) 24V DC (18-25V) 230VAC Adapter to 12V DC Included with all systems			
<b>Power Usage</b>	24VDC 35W	24VDC 35W	24VDC 45W	24VDC 45W
<b>Size WxHxD MM</b>	339x270x69	399x323x75	451x367x69	480x390x69
<b>Weight</b>	3.2Kg	3.6Kg	4.2Kg	4.6Kg
<b>Operating Temp</b>	0C to +50C			
<b>Humidity (RH)</b>	10% - 90%			
<b>Display Lifetime</b>	Operation Lifetime (LED) Minimum 50.000 Hours Operation life means brightness goes down to 50% to initial brightness. Minimum operation life time is estimated data.			
<b>Vibration</b>	1.0G, 5-500Hz Random			
<b>Mounting</b>	VESA 100 / Panel Mount			
<b>Warranty</b>	5 Years			
<b>Approvals</b>	CE / FCC			

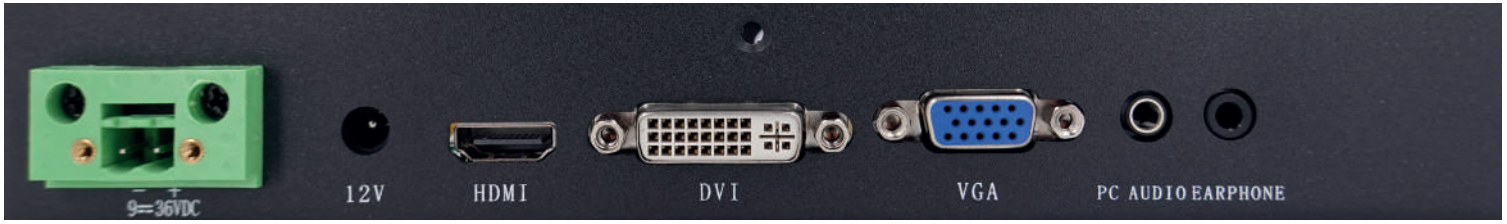

### Display Cutout Holes

21.8 CM

31.8 CM

37.7 CM

17.5 CM

8"

25 CM

12"

30.3 CM

15"

42.9 CM

46.6 CM

34.7 CM

17"

37.4 CM

19"