



Features
4:3 Display size, Modular design, Easily upgradeable, IP65 Front panel, Esaver function.

Product Specifications

Screen	12" Display	15" Display	17" Display	19" Display
Resolution	1024x768	1024x768	1280x1024	1280x1024
Brightness	300cd/m2	300cd/m2	300cd/m2	300cd/m2
Touchscreen	Resistive Touch 4/5 wire (Option for Capacitive touch)			
CPU	Intel J6412 2.0 Ghz 4 Core			
RAM	4GB DDR4 (Standard) up to 32GB DDR4			
Storage	32 - 1000GB (Optional 1-3pcs Disk)			
I/O Ports	1 x RS232, 1 x RS422/485 / 2 x HDMI / 6 x USB / 2 x LAN RJ45 / 1 x Power Switch / 1 x GND / 1 x 12-24VDC Input 1 x 12-24VDC Input / 2 x WiFi (Optional)			
Power Input	12VDC (11,5-12,5V) 12-24VDC (18-25V) 230VAC Adapter to 12V DC Included with all systems			
Power Usage	24VDC 35W	24VDC 35W	24VDC 45W	24VDC 45W
Size WxHxD MM	339x270x69	399x323x75	451x367x69	480x390x69
Weight	3.2Kg	3.6Kg	4.2Kg	4.6Kg
O/S	Win 11 / Win 10 IoT / Win 10 Pro / Linux			
Operating Temp	0C to +50C			
Humidity (RH)	10% - 90%			
Display Lifetime	Operation Lifetime (LED) Minimum 50.000 Hours Operation life means brightness goes down to 50% to initial brightness. Minimum operation life time is estimated data.			
MTBF	100.000 Hours			
Vibration	1.0G, 5-500Hz Random			
Mounting	VESA 100 / Panel Mount			
Warranty	5 Years			
Approvals	CE / FCC / RoHS			

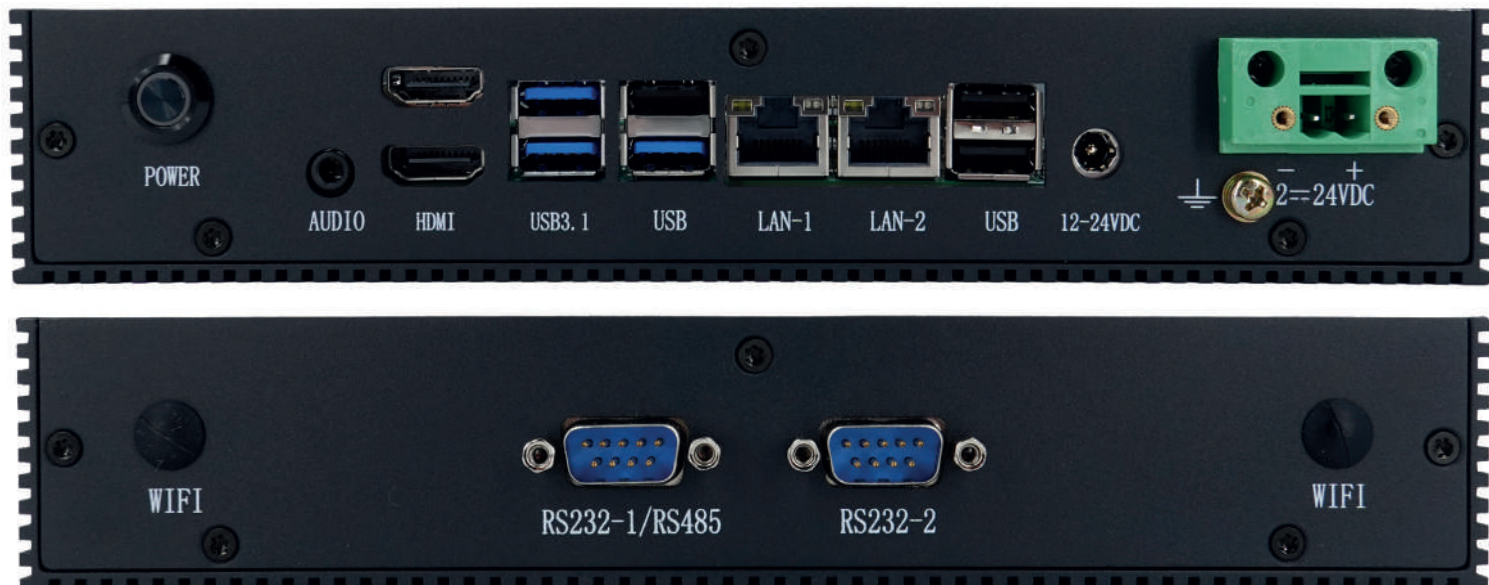

Panel PC Cutout Holes

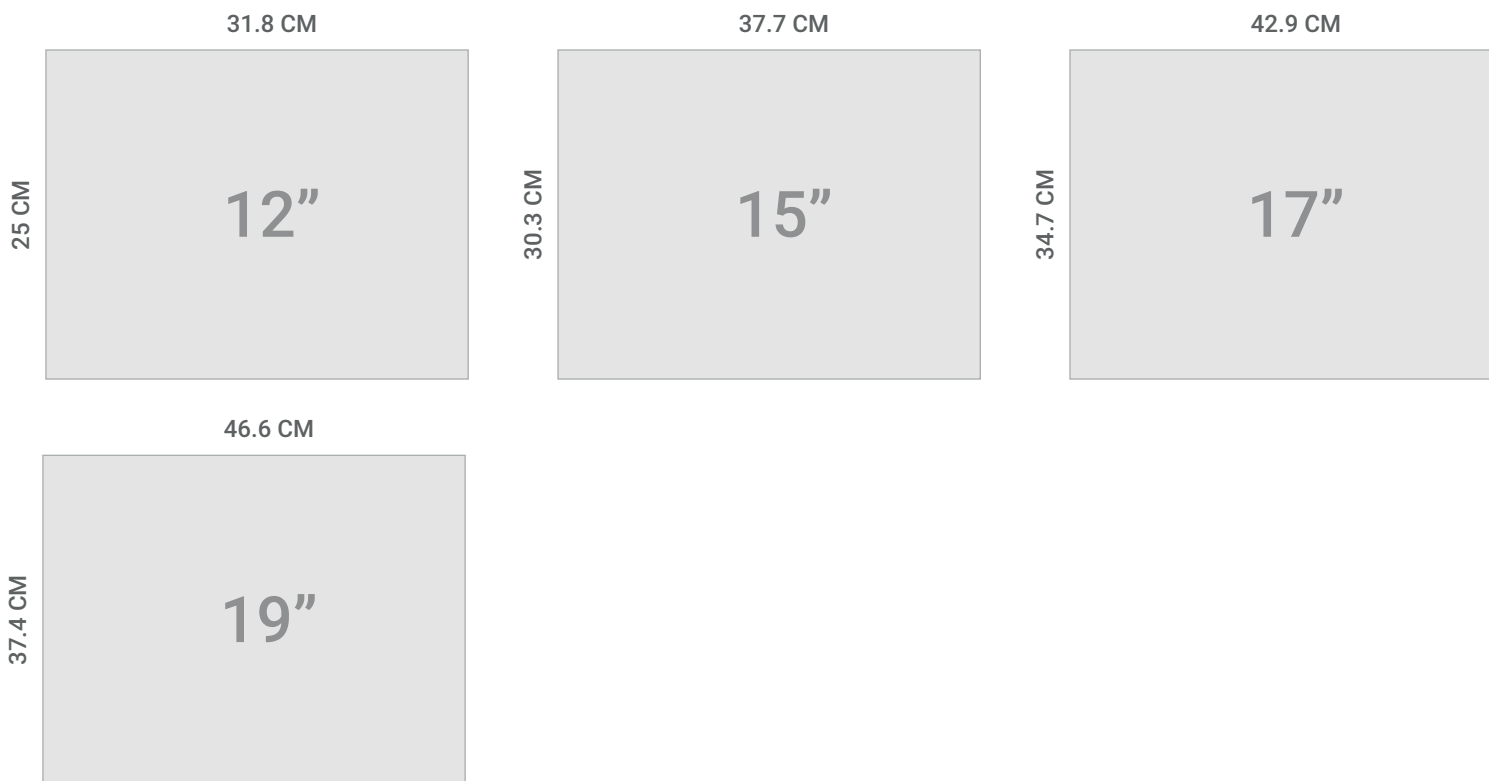

Order information

SFAS-00-0261	12 Tum 4:3 Display Panel PC / CPU J6412 / RAM DDR4 4GB / HD M2 60GB
SFAS-00-0262	15 Tum 4:3 Display Panel PC / CPU J6412 / RAM DDR4 4GB / HD M2 60GB
SFAS-00-0263	17 Tum 4:3 Display Panel PC / CPU J6412 / RAM DDR4 4GB / HD M2 60GB
SFAS-00-0264	19 Tum 4:3 Display Panel PC / CPU J6412 / RAM DDR4 4GB / HD M2 60GB